# 149-13 COMPONENT TESTING: LIFTGATE LOCK SWITCH



**TERMINALS**

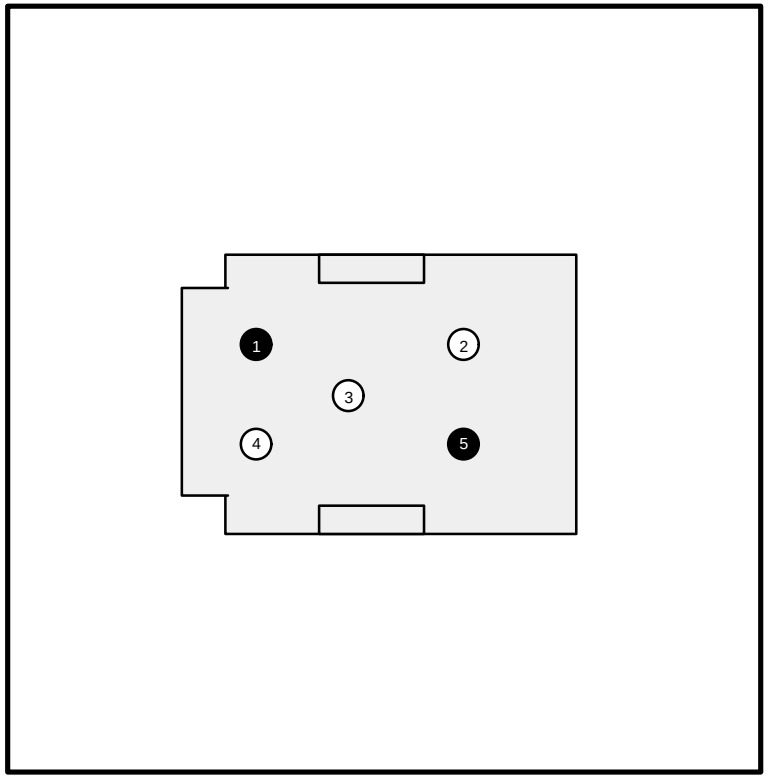


**COMPONENT TESTING PROCEDURE**

| TO TEST | Connect Self-Powered Test Lamp or Ohmmeter to Terminals | Move Switch to These Positions | A Good Switch Will Indicate |
|---|---|---|---|
| **Liftgate Lock** | 3 and 4<br>2 and 3 | Lock<br>Unlock | Closed Circuit<br>Closed Circuit |
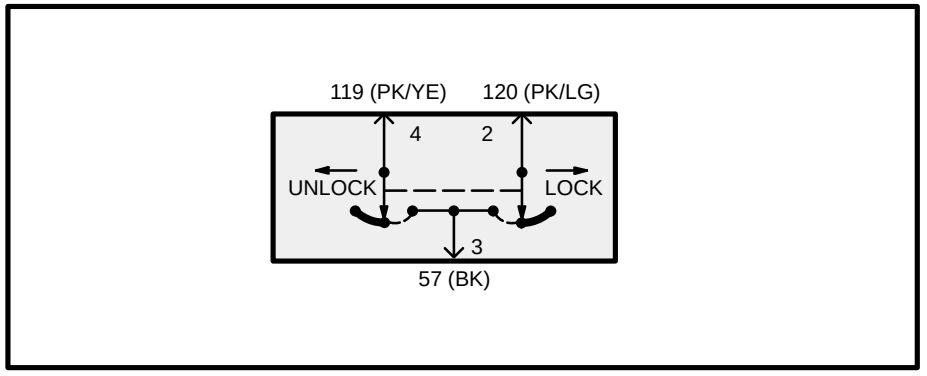
**SCHEMATIC**