Component Testing – Headlamp switch

SCHEMATIC

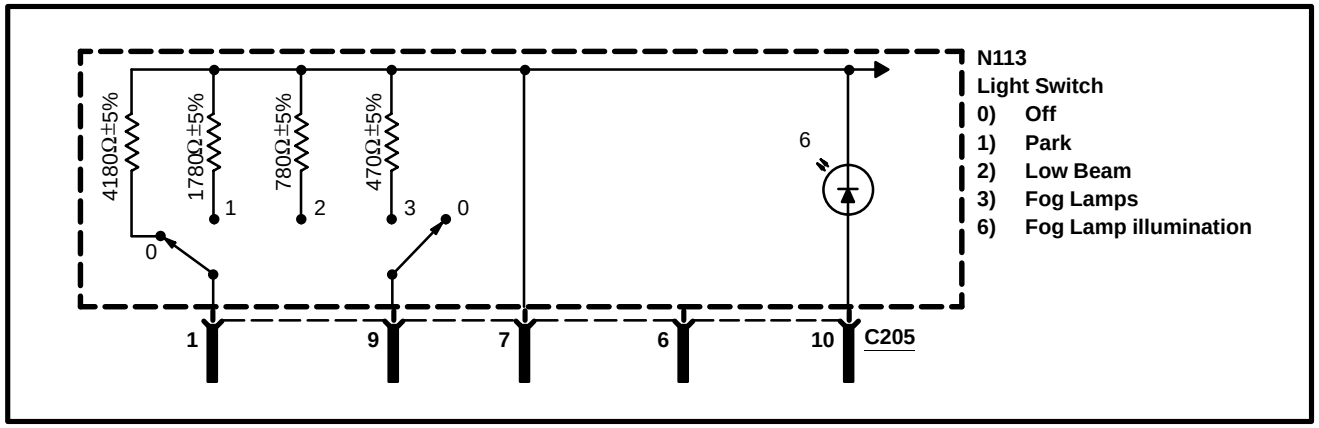

TERMINAL LOCATIONS

C205

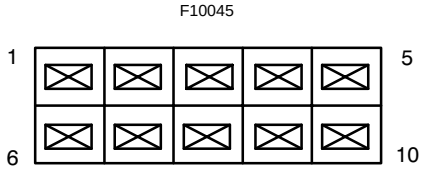

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Park Lamp	1 and 7	Park Lamps	1780Ω
Low Beam	1 and 7	Low Beam	780Ω
Fog Lamps	9 and 7	ON	470Ω
		OFF	∞