Component Testing – Power window switch, passenger side

SCHEMATIC

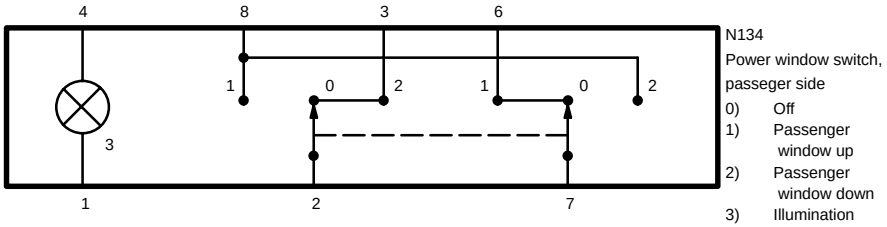

TERMINAL LOCATIONS

C608



COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Power and Ground	8 and 6 8 and 3	All switches, All positions	Open Circuit
Window Regulator Circuit	8 and 2 6 and 7	Up	Closed Circuit
	8 and 7 3 and 2	Down	Closed Circuit