Component Testing – Door lock switch

SCHEMATIC

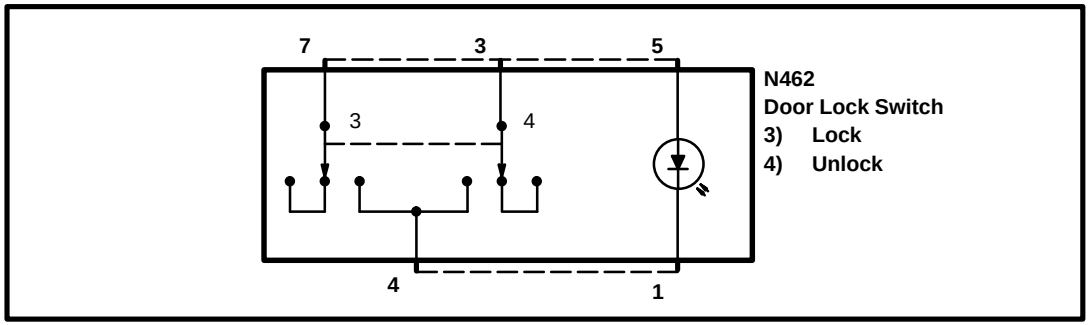

TERMINAL LOCATIONS

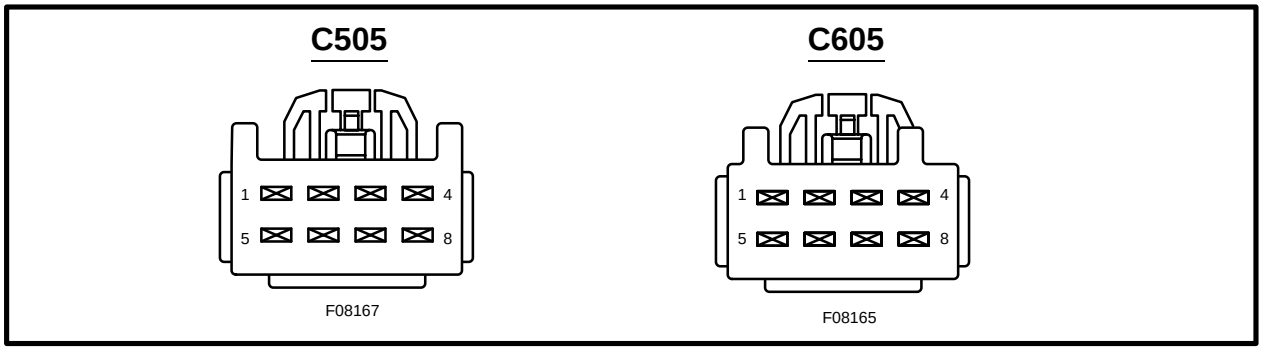

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch will Indicate
Door Lock Switch	7 and 4	Lock	Closed Circuit
		Unlock	Open Circuit
		Neutral	Open Circuit
	3 and 4	Lock	Open Circuit
		Unlock	Closed Circuit
		Neutral	Open Circuit