# 149-11 COMPONENT TESTING: RF WINDOW/DOOR LOCK CONTROL SWITCH



## COMPONENT TESTING PROCEDURE

| TO TEST | Connect Self-Powered Test Lamp or Ohmmeter to Terminals | Move Switch to These Positions | A Good Switch Will Indicate |
|---|---|---|---|
| **Door Lock Circuit** | 6 and 7 | Lock<br>Rest<br>Unlock | Closed<br>Open<br>Open |
| | 5 and 3 | Lock<br>Rest<br>Unlock | Closed<br>Closed<br>Open |
| **Door Unlock Circuit** | 6 and 3 | Lock<br>Rest<br>Unlock | Open<br>Open<br>Closed |
| | 4 and 7 | Lock<br>Rest<br>Unlock | Open<br>Closed<br>Closed |
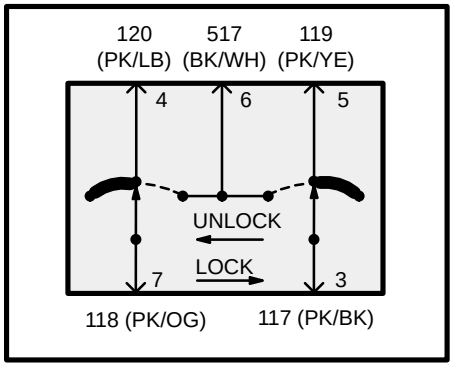
## SCHEMATIC