-9

Power Door Lock Switch

SCHEMATIC

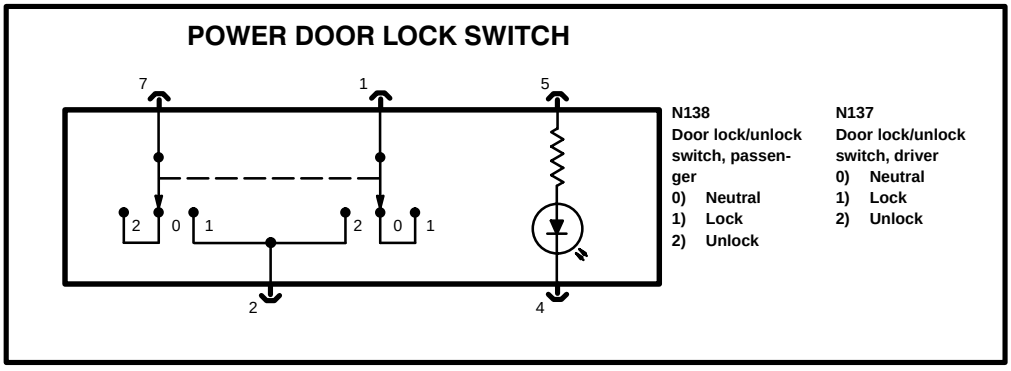

TERMINAL LOCATIONS

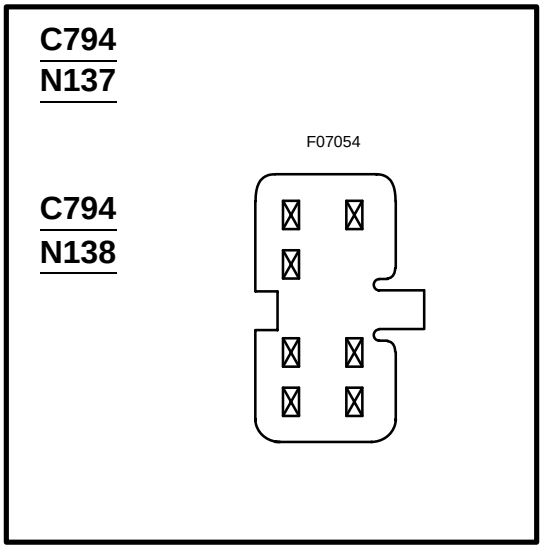

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Lock/Unlock Circuit	2 and 1	Neutral	Open Circuit
		Lock	Open Circuit
		Unlock	Closed Circuit
	2 and 7	Neutral	Open Circuit
		Lock	Closed Circuit
		Unlock	Open Circuit
	1 and 7	Neutral	Open Circuit
		Lock	Open Circuit
		Unlock	Open Circuit