Component Testing – Exterior rear view mirror switch

SCHEMATIC

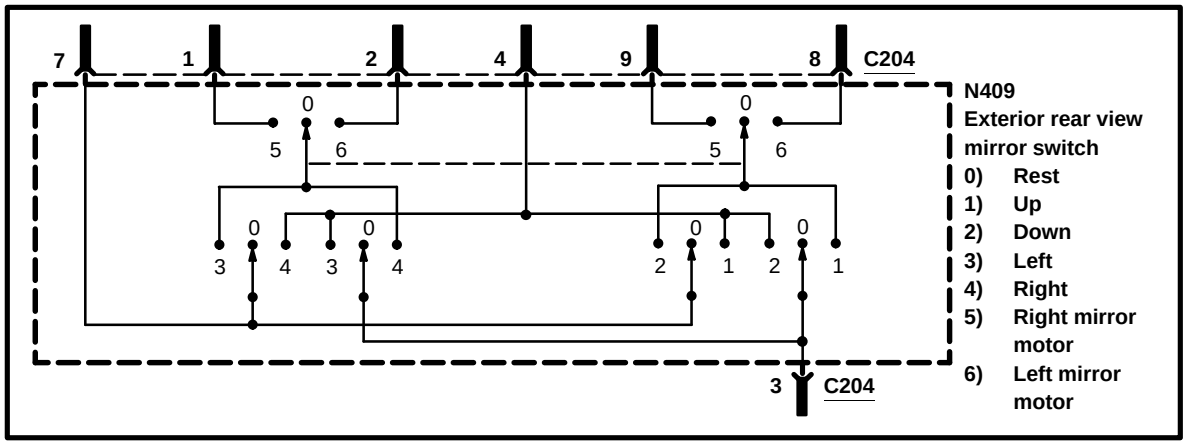

TERMINAL LOCATIONS

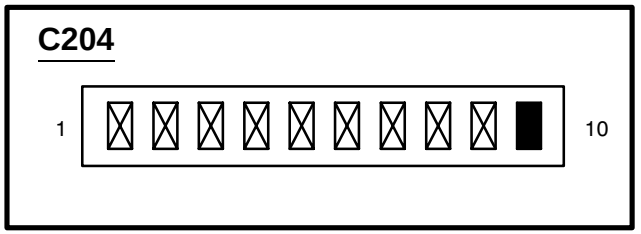

COMPONENT TESTING PROCEDURE

TO TEST		Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Left Mirror	**Up**	3 and 8 4 and 7	Selector Switch Left Adjuster Switch Up	Closed Circuit Closed Circuit
	Down	7 and 8 3 and 4	Selector Switch Left Adjuster Switch Down	Closed Circuit Closed Circuit
	Left	2 and 7 3 and 4	Selector Switch Left Adjuster Switch Left	Closed Circuit Closed Circuit
	Right	2 and 3 4 and 7	Selector Switch Left Adjuster Switch Right	Closed Circuit Closed Circuit
Right Mirror	**Up**	3 and 9 4 and 7	Selector Switch Right Adjuster Switch Up	Closed Circuit Closed Circuit
	Down	3 and 4 7 and 9	Selector Switch Right Adjuster Switch Down	Closed Circuit Closed Circuit
	Left	1 and 7 3 and 4	Selector Switch Right Adjuster Switch Left	Closed Circuit Closed Circuit
	Right	1 and 3 4 and 7	Selector Switch Right Adjuster Switch Right	Closed Circuit Closed Circuit