Component Testing – Roof opening panel switch

SCHEMATIC

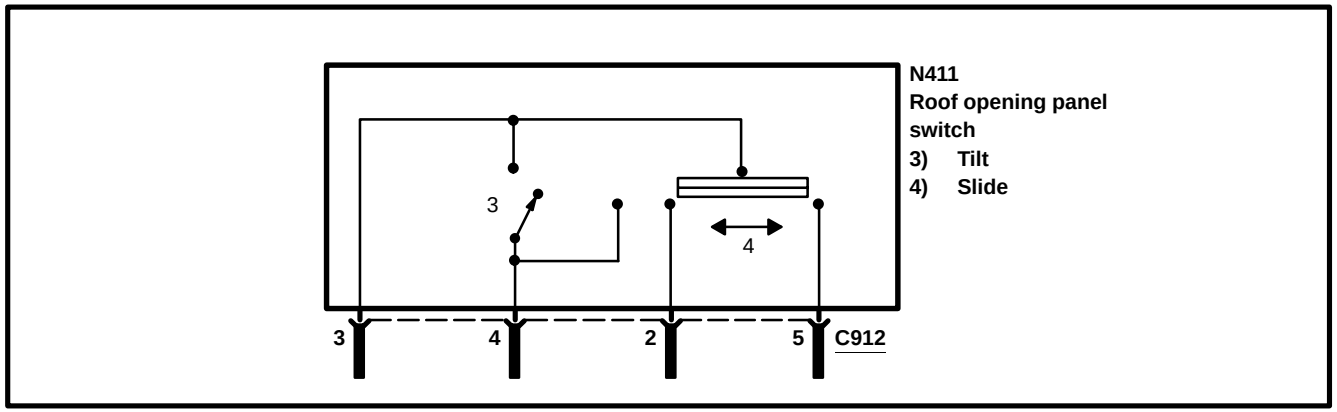

TERMINAL LOCATIONS

C912



COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Tilt	3 and 4	Tilt	Closed Circuit
Slide	3 and 5	Close	Closed Circuit
	3 and 2 3 and 4	Open	Closed Circuit