Headlamp switch, Exterior lamps

Schematic

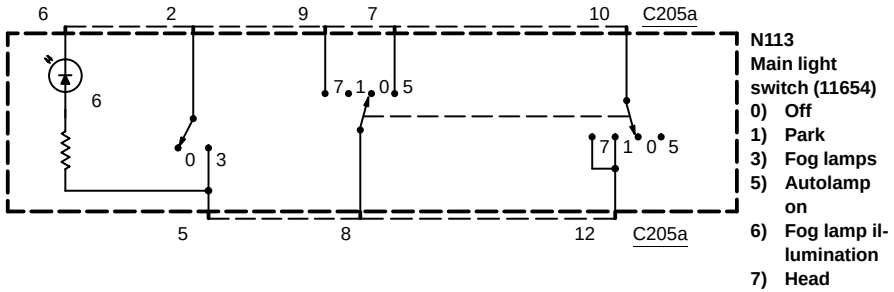

N113
Main light switch (11654)
0) Off
1) Park
3) Fog lamps
5) Autolamp on
6) Fog lamp illumination
7) Head

Terminals

C205a

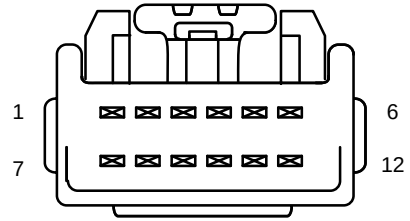

F12101

Component testing procedure

Circuit to test	Connect self–powered test light or ohm-meter to terminals	Move switch to these positions	A good switch will indicate
Headlamps	9 and 8	Off	Open circuit
		Head	Closed circuit
		Park	Open circuit
		Autolamps On	Open circuit
Park lamps	11 and 12	Off	Open circuit
		Head	Closed circuit
		Park	Closed circuit
		Autolamps On	Open circuit
Autolamp Circuit	7 and 8	Off	Open circuit
		Head	Open circuit
		Park	Open circuit
		Autolamps On	Closed circuit
Fog lamps	2 and 5	On	Closed circuit
		Off	Open circuit