Power window switch, passenger side

Schematic

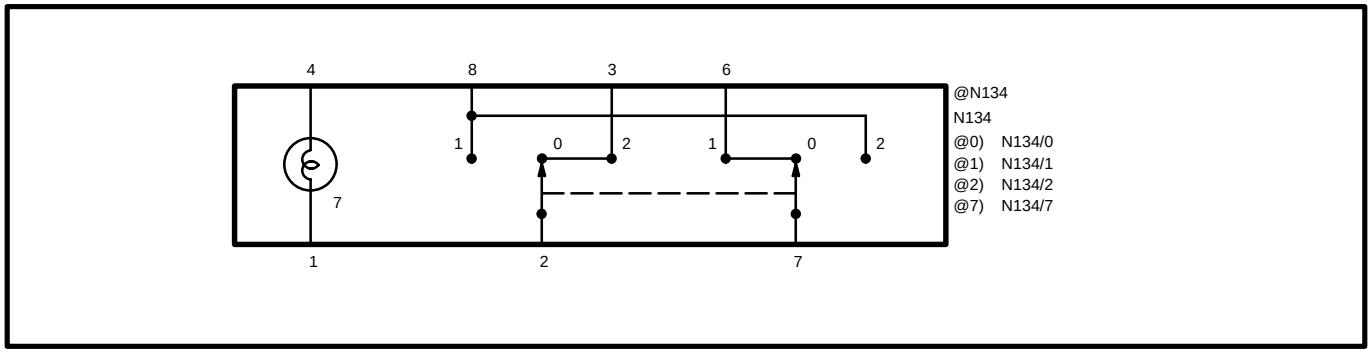

Terminal locations

C608



Component testing procedure

Circuit to test	Connect self–powered test light or ohmmeter to terminals	Move switch to these positions	A good switch will indicate
Power and Ground Checks Before Any Other Tests	8 and 6 8 and 3	all positions	Open circuit
Window regulator circuit	8 and 2 6 and 7	Up	Closed circuit
	8 and 7 3 and 2	Down	Closed circuit